


## Pneumatic Positioner - SDPP 1200R




Pneumatic positioner is an useful interlinking device controlling cylinder / valve movement in proportion to pneumatic signal ranging between 0.2 to 1 bar (3 to 15 psi) or split ranges. The salient features of Schrader Pneumatic Positioner are :

- It is compact.
- Works effectively under adverse environmental conditions
- It is economical due to minimal air consumption.
- Provision of orifice-disc to prevent hunting in small size actuators.
- Convenient changeover from single acting to double acting and vice versa.

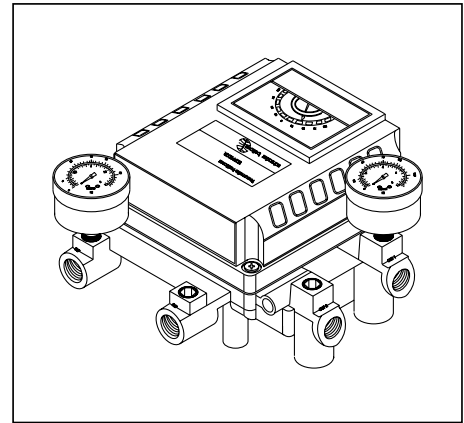

## SPECIFICATIONS

ITEM	SINGLE	DOUBLE
Input Signal	0.2-1 kgf/cm <sup>2</sup> ( 3-15 psi )	
Supply Pressure	1.4-7Kgf/cm <sup>2</sup> ( 20-100 Psi )	
Stroke (Linear/Rotary)	50 to 1200 m.m. / 0 to 90°	
Air Connection	PT ( NPT ) ¼"	
Gauge Connection	PT ( NPT ) 1/8"	
Conduit	PF ½" ( G½" )	
Protection	IP 66	
Ambient Temp.	-20°-70°C	
Linearity	± 2% F.S.	
Hysteresis	± 1% F.S.	
Sensitivity	± 0.5% F.S.	
Repeatability	± 0.5% F.S.	
Air Consumption	3LPM ( Sup=1.4Kgf/cm <sup>2</sup> , 20psi )	
Flow Capacity	80LPM ( Sup=1.4Kgf/cm <sup>2</sup> , 20psi )	
Material	Aluminium Die Casting	
Weight	1.7Kg. ( 3.1 lb )	

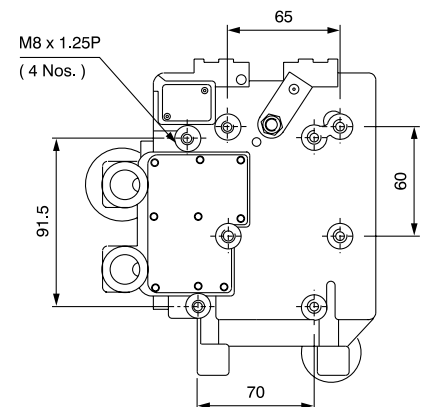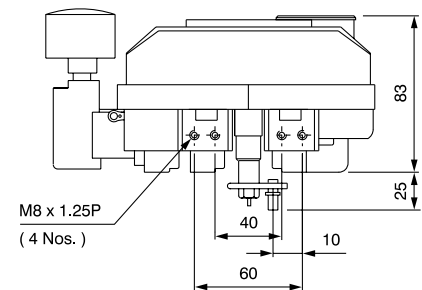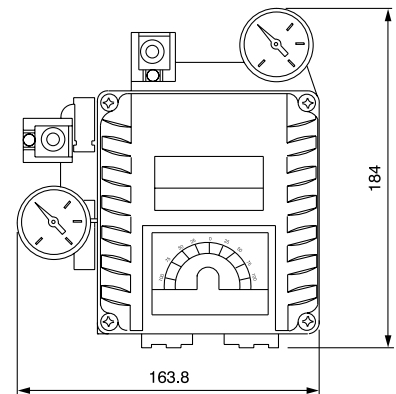

## OPTIONAL FEATURES

Position Transmitter	External Arrangement
	Input Signal : 0-90° (Obtained From Positioner)
	Output Signal : 4-20mA DC
	Load Resistance : 0-600 ohm
	Supply Voltage : 15-30 V DC
Limit Switch	Internal Arrangement
	Rating : AC 0.6A 125V-16A 250V
	Switch Type : 2 x SPDT

